

Cooperative Relaying in Downlink for IEEE 802.16j

IEEE 802.16 Presentation Submission Template (Rev. 8.3)

Document Number:

IEEE S802.16j-07/124

Date Submitted:

2007-01-16

Source:

Jimmy Chui, Aik Chindapol
Siemens Corporate Research

Voice: +1 609 734 3364
E-mail: aik.chindapol@siemens.com

Kyu Ha Lee, Changkyoon Kim, Hyung Kee Kim
Samsung Thales Co., Ltd.

Voice: + 82 31 280 9917
E-mail: kyuha.lee@samsung.com

Byung-Jae Kwak, Sungcheol Chang, D. H. Ahn, Young-il Kim
ETRI

Voice: + 82 42 860 6618
E-mail: bjkwak@etri.re.kr

Anxin Li, Mingshu Wang, Xiangming Li, Hidetoshi Kayama, Daqing Gu
DoCoMo Beijing Labs

Voice: + 86 10 82861501
Email: {liax, gu}@docomolabsbeijing.com.cn

Fujio Watanabe
DoCoMo USA Labs

Voice: 650-496-4726
Email: watanabe@docomolabs-usa.com

Haihong Zheng, Adrian Boariu, Yousuf Saifullah, Shashikant Maheshwari
Nokia
haihong.1.zheng, Yousuf.saifullah}@nokia.com

Voice: 972 894 5000
Email: {peter.wang@nokia.com, Adrian.Boariu@nokia.com}

Venue:

IEEE 802.16 Session #47

Base Document:

None

Purpose:

This is a response to Call for Technical Proposals regarding IEEE Project P802.16j.

Notice:

This document has been prepared to assist IEEE 802.16. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.

Release:

The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.

IEEE 802.16 Patent Policy:

The contributor is familiar with the IEEE 802.16 Patent Policy and Procedures <http://ieee802.org/16/ipr/patents/policy.html>, including the statement "IEEE standards may include the known use of patent(s), including patent applications, provided the IEEE receives assurance from the patent holder or applicant with respect to patents essential for compliance with both mandatory and optional portions of the standard." Early disclosure to the Working Group of patent information that might be relevant to the standard is essential to reduce the possibility for delays in the development process and increase the likelihood that the draft publication will be approved for publication. Please notify the Chair <mailto:chair@wirelessman.org> as early as possible, in written or electronic form, if patented technology (or technology under patent application) might be incorporated into a draft standard being developed within the IEEE 802.16 Working Group. The Chair will disclose this notification via the IEEE 802.16 web site <http://ieee802.org/16/ipr/patents/notices>.

Introduction

- General relay transmission using exclusive time-frequency resources
- How can we efficiently use resources?

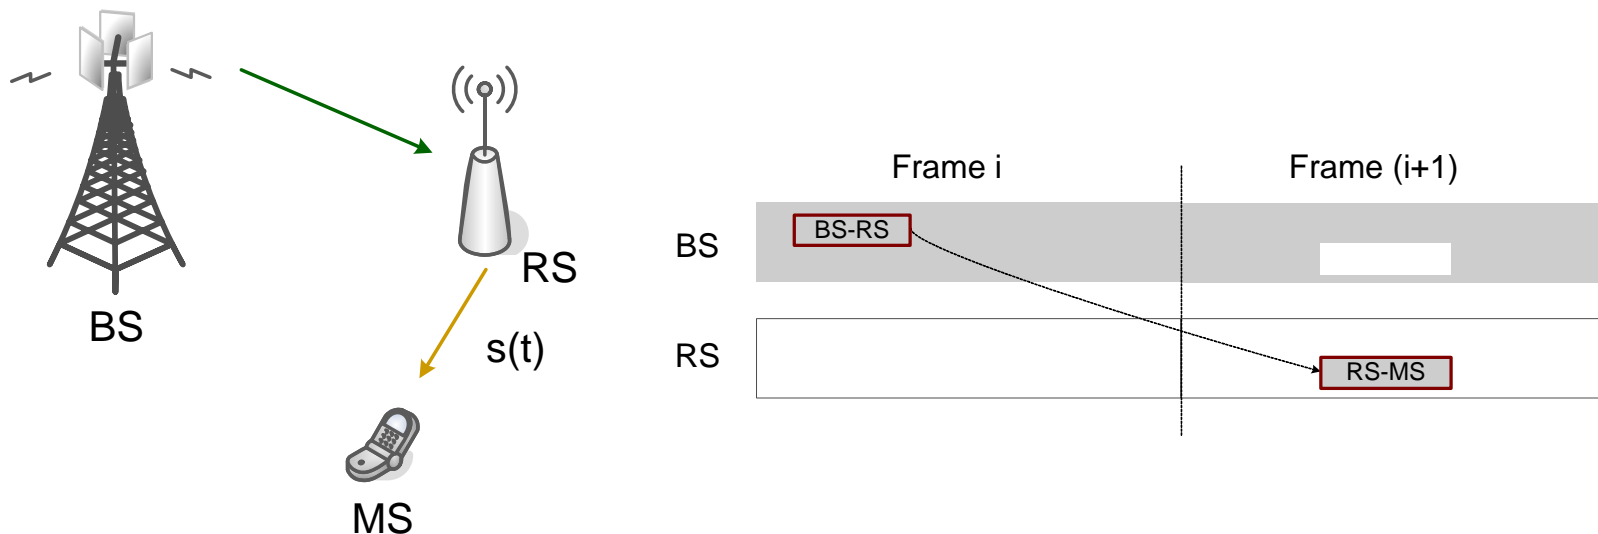


Fig. 1. Example of general relay transmission

Introduction

- General relay transmission using exclusive time-frequency resources
- How can we efficiently use resources?

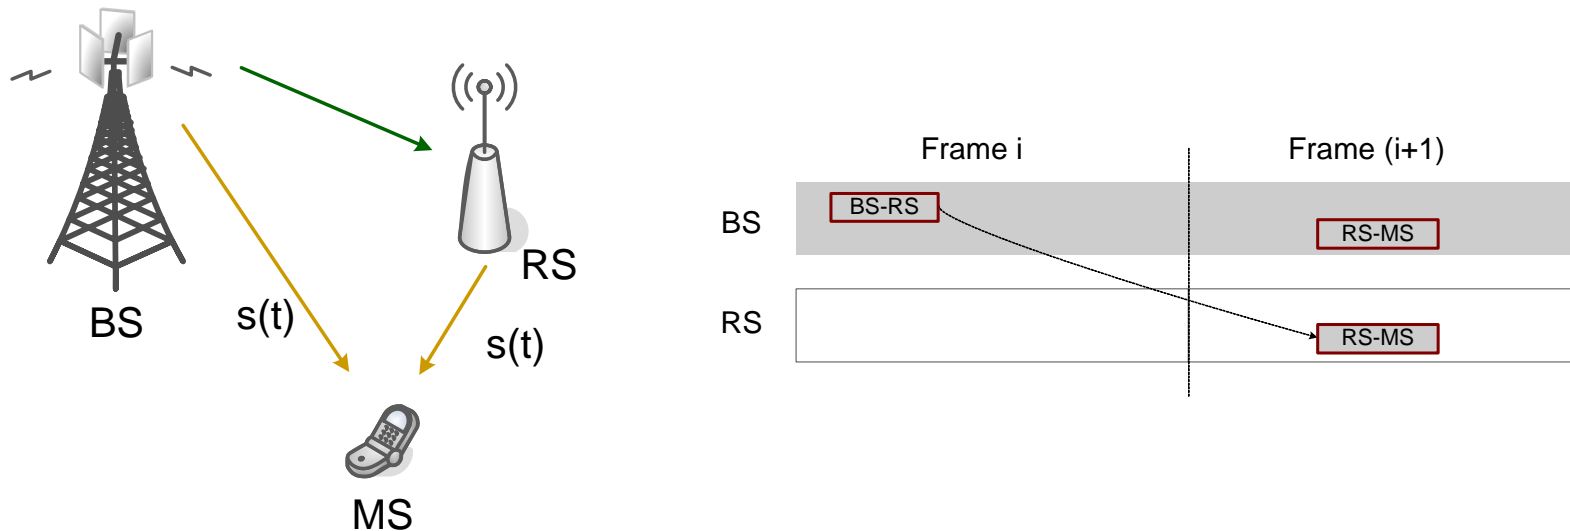


Fig. 1. Example of general relay transmission

Cooperative Relaying in R-DL



- Cooperative source diversity
 - Multiple sources with the same signals
- Cooperative transmit diversity
 - Multiple sources with STC-coded signals
- Cooperative hybrid diversity
 - Combination of source and transmit diversity

Cooperative source diversity



- Legacy SS/MS: no STBC support req'd
- Proposed method
 - Diversity gain using multiple signal sources
 - Simultaneous transmission in one or multiple RS & BS using the same media & data
 - Effective solution to the pilot collision problem
 - No additional functionality for MS
- Requirement :
 - Timing difference between sources $<$ CP duration

Cooperative source diversity (cont.)

- Example

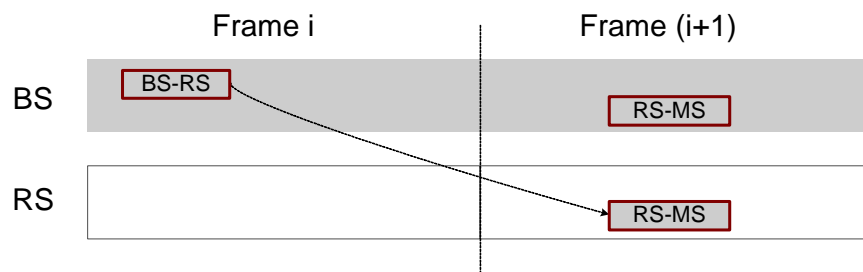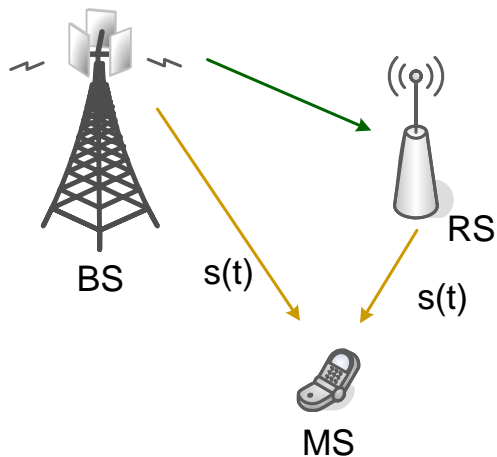


(a) Usage of BS & RS

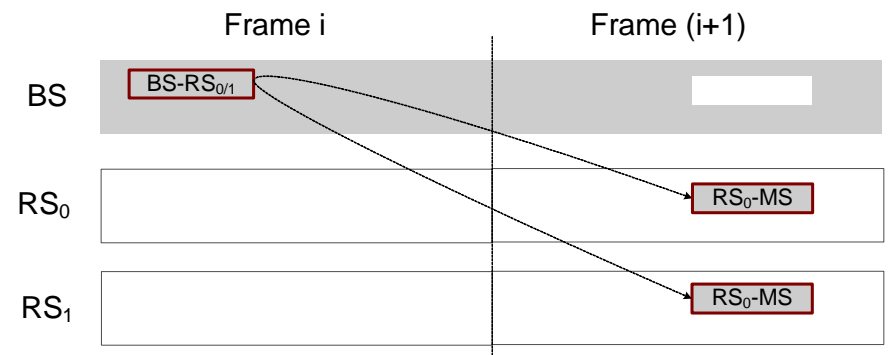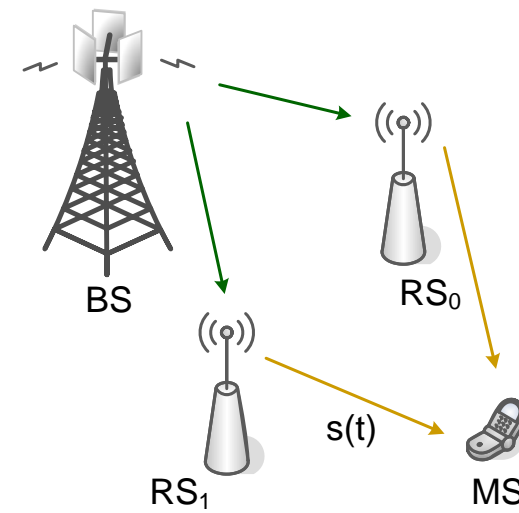

(b) Usage of multiple RSs

Cooperative source diversity (cont.)

- Example

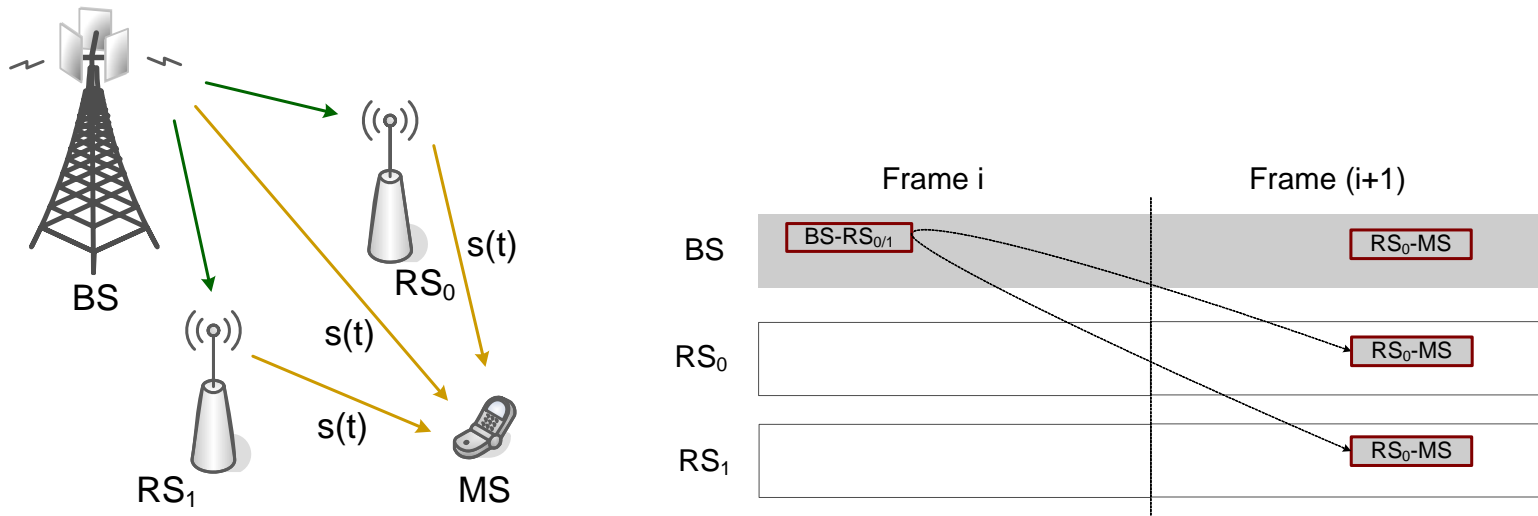


(c) Usage of BS & multiple RSs

Fig. 2. Examples of cooperative source diversity


Cooperative source diversity (cont.)

- To keep SS unchanged, RS shall use the same OFDMA subcarrier allocation algorithm for downlink transmissions, i.e. RS will insert pilot signals at the same locations as BS.
- During concurrent transmissions of BS and RSs, SS in the overlap area will hear superposed pilots, and thus estimate a sum of the channel rather than the true data channel response. The performance of the involved SSs will be greatly degraded by using wrong channel estimation for data detection.
- This problem, named as pilot collision, is a special problem after the introduction of RS.

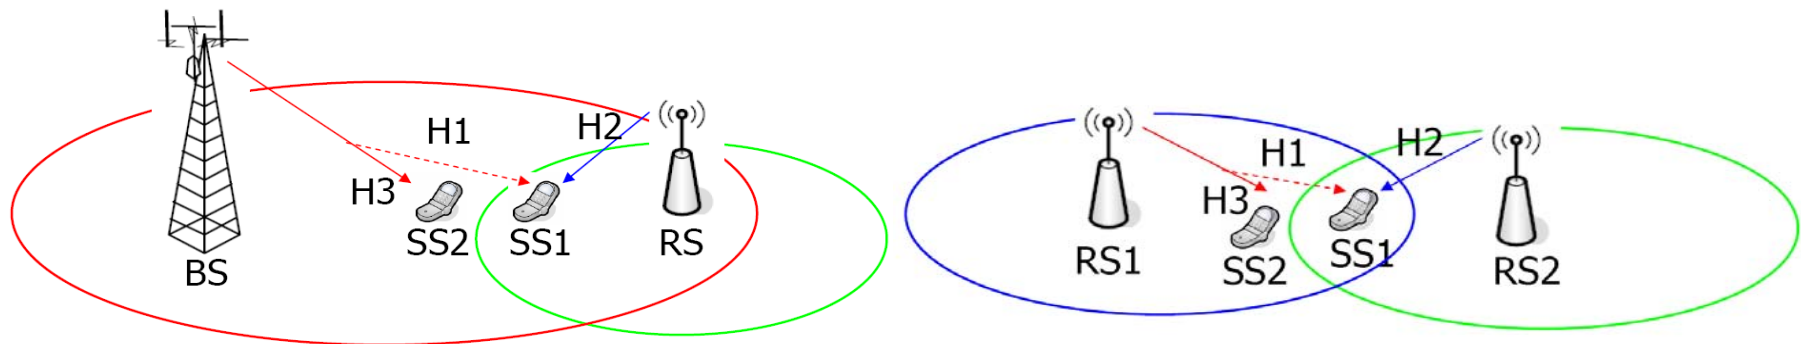

Cooperative source diversity (cont.)

- Cooperative source diversity is an effective solution to the pilot collision problem.
- Pilot collision will be solved because SS not only received the “collided pilot” but also the “collided data”.




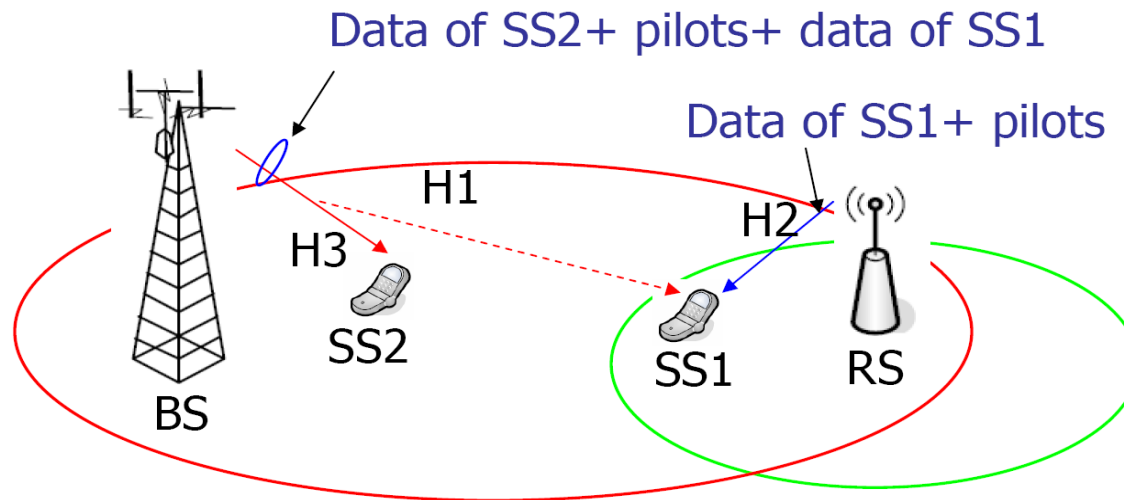


Cooperative transmit diversity

- For SS/MS having STBC decoder
- Proposed method
 - Transmit diversity using multiple signal source
 - Usage of different STC encoding in each signal source
 - Two choices: No processing at RS or Low processing at RS
- Requirement :
 - Timing difference between sources $<$ CP duration

Cooperative transmit diversity (cont.)


- Example

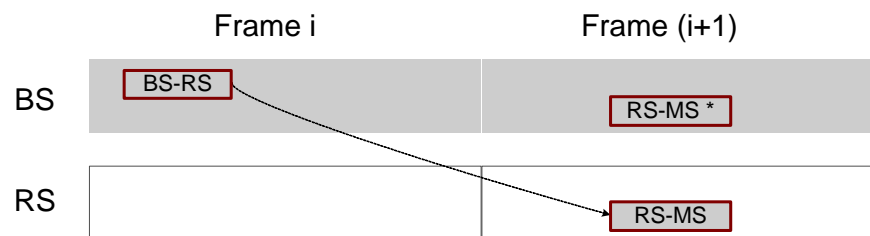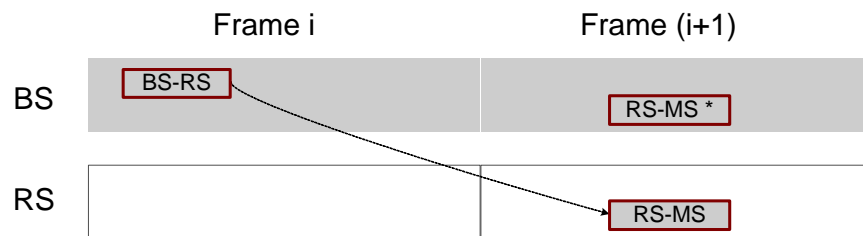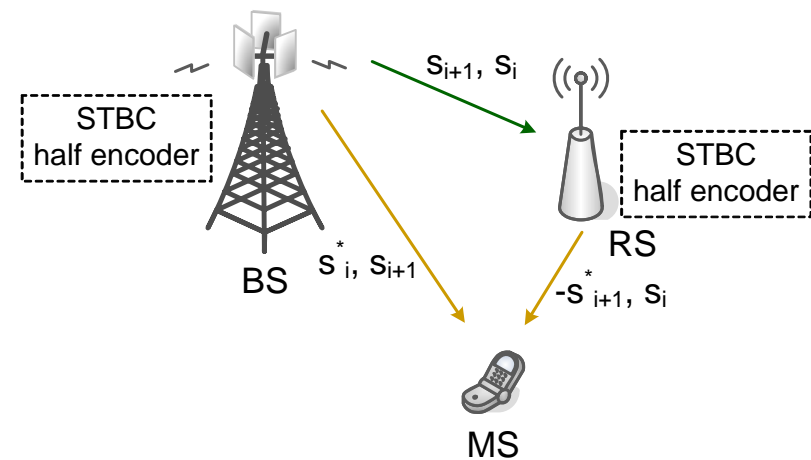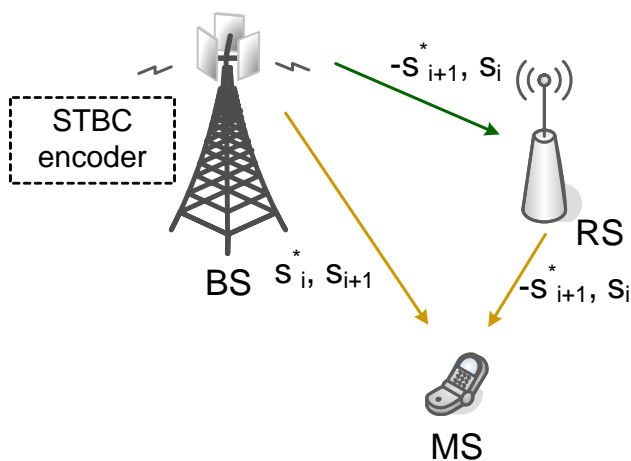

(a) Usage of the different STC encoded BS & RS

Cooperative transmit diversity (cont.)

- Example

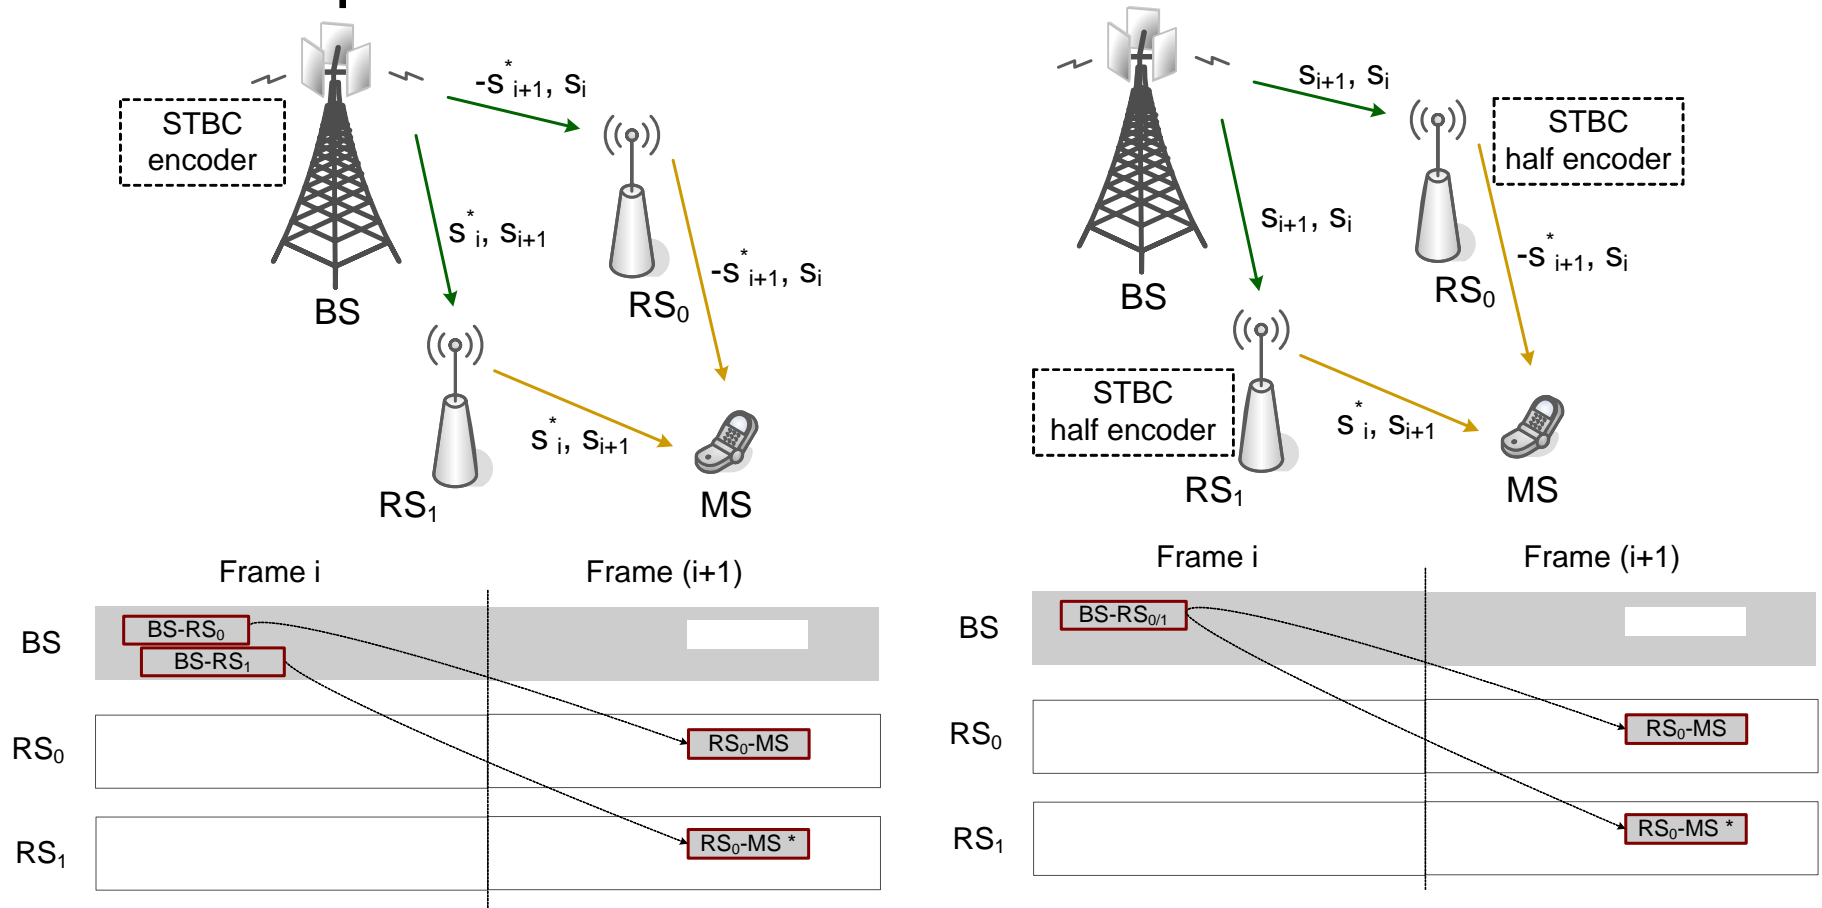

(b) Usage of the different STC encoded RSs

Fig. 3. Examples of cooperative source diversity

Cooperative hybrid diversity

- Combination of source & transmit diversity
- Example


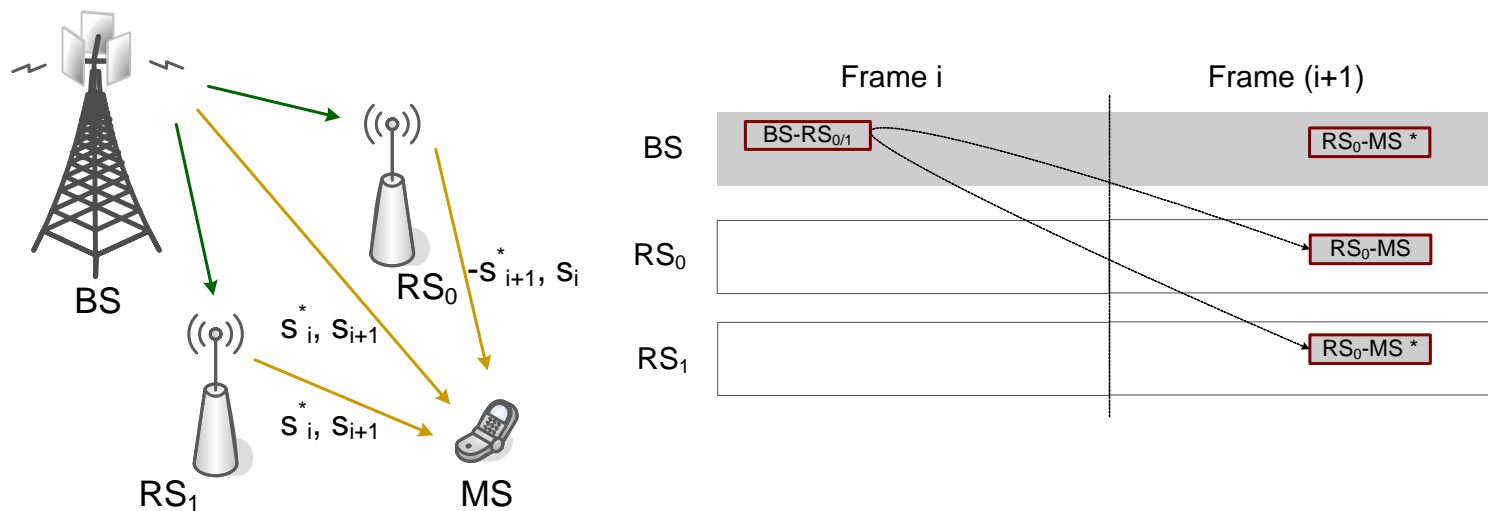


Fig. 4. Example of the same STC encoded sources of BS & a RS and another STC encoded source of RS

Example with STBC for 4 Tx

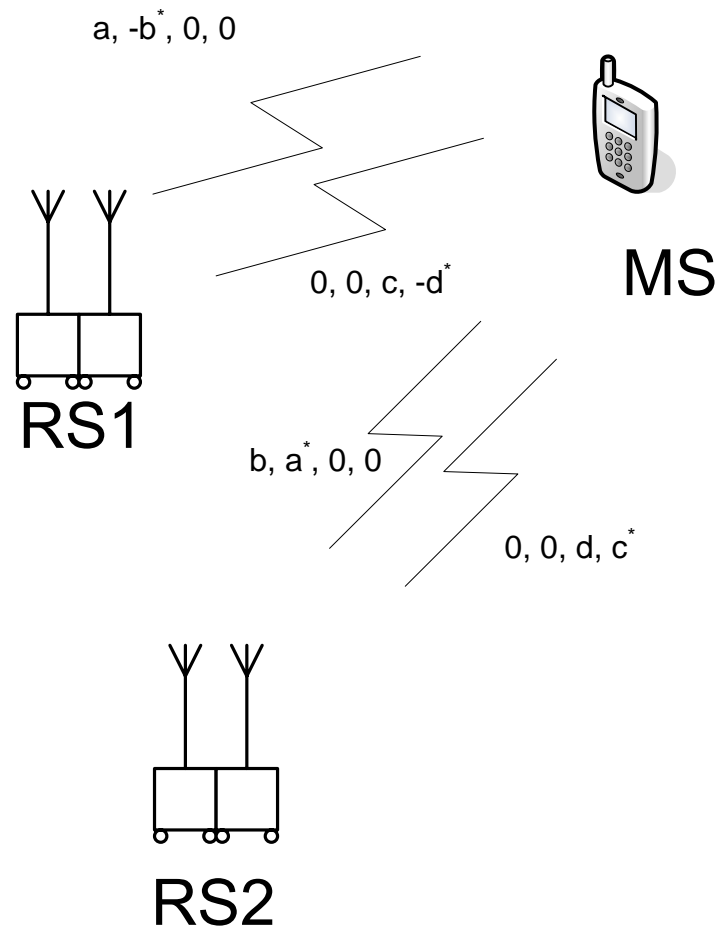


Summary

- Cooperative transmission is a promising technique for mobile relay network
- Three cooperative relay schemes are proposed
 - Cooperative source diversity
 - Cooperative transmit diversity
 - Cooperative hybrid diversity
- Advantages
 - Large diversity gain
 - Effectively combat pilot collision

Backup Slides

Example of Pilot Collision

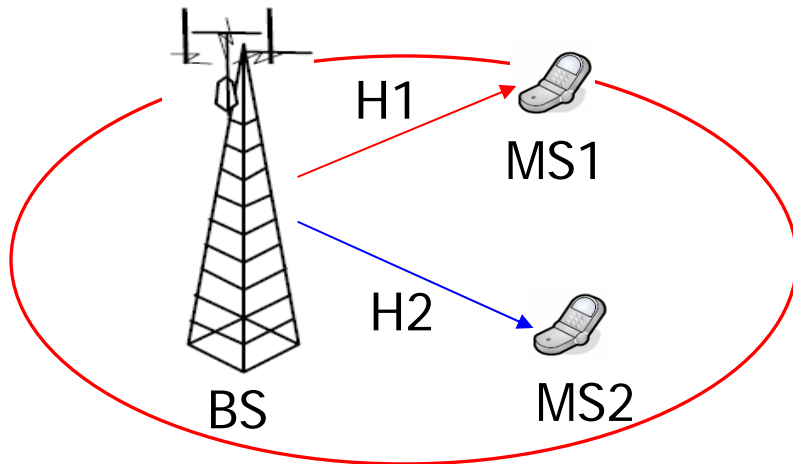


Traditional PMP transmission



- MS1 estimates H1 on subchannel 1 by pilots;
- MS2 estimates H2 on subchannel 2 by pilots;

Pilot Collision

- MS1 overhears the pilots of BS and get a estimation of $H1 + H2$ on subchannel 1;
- However, the true data subchannel response of MS1 is H2;

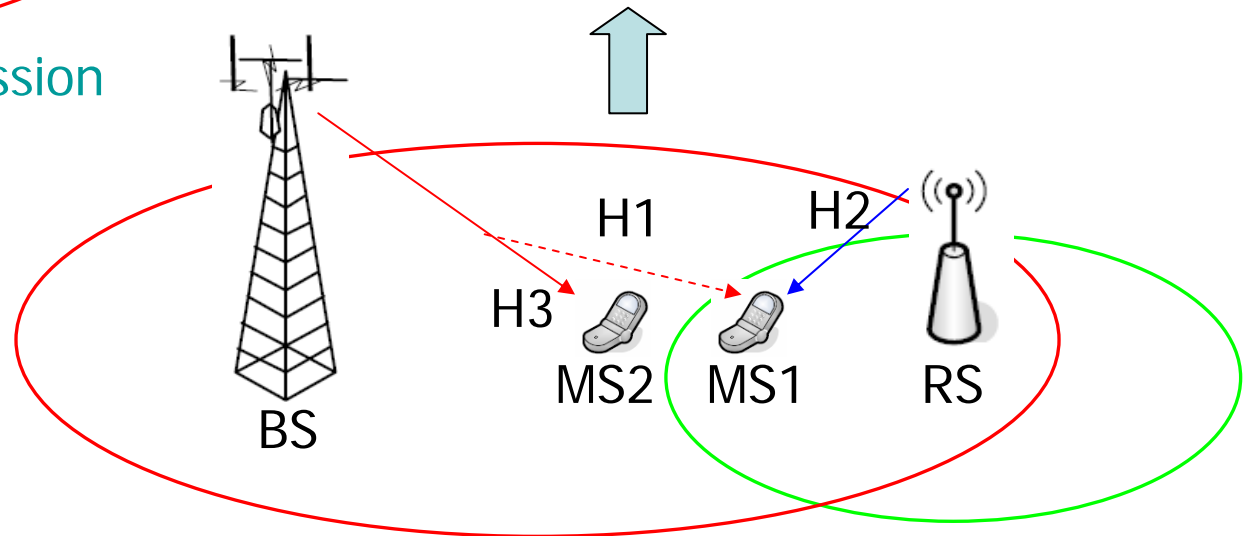

Transmission in 802.16j